48" RCP O-RING JOINT REINFORCED

DESIGN NOTES:

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL B.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
4. CIRCUM. REINFORCEMENT:
   - CLASS III 0.24 SQ. IN. PER FT. INNER CAGE
     0.18 SQ. IN. PER FT. OUTER CAGE
   - CLASS IV 0.42 SQ. IN. PER FT. INNER CAGE
     0.32 SQ. IN. PER FT. OUTER CAGE
   - CLASS V 0.73 SQ. IN. PER FT. INNER CAGE
     0.55 SQ. IN. PER FT. OUTER CAGE
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443 & C361

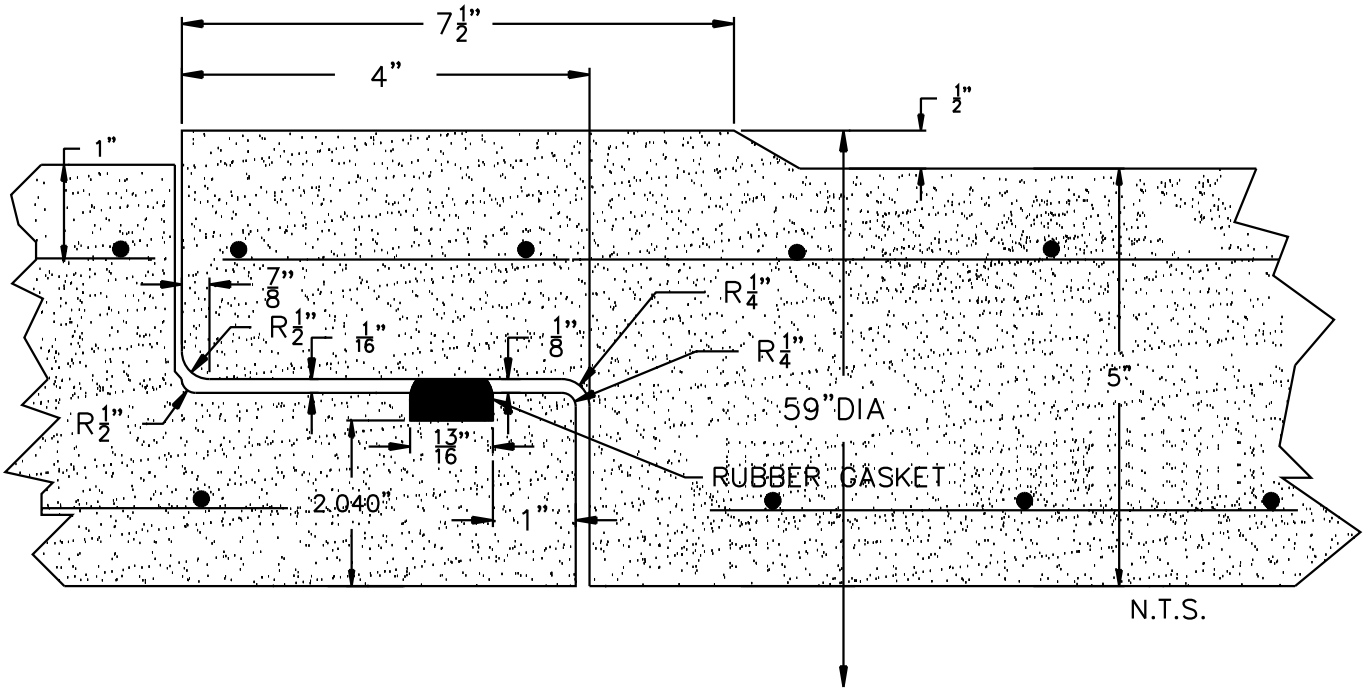

NPCA
Precast ... The Concrete Solution.

SCITUATE COMPANIES

SCITUATE CONCRETE PIPE
P.O. BOX 870 * 1 BUCKEYE LANE
SCITUATE, MA 02066
PHONE # 1-800-322-4488
FAX # 781-545-6021

CONTRACTOR:	JOB NAME:	
DATE:	APPROVED BY:	DRAWING BY: C.J. SCOTT